


# Data sheet

|                |   |
|----------------|---|
| Part No.       | <b>BSSH</b>   |
| Description    | rigid conduit, plain ends<br>medium compression resistance,<br>medium impact resistance |
| Colour         | black, similar to RAL 9005<br>white, similar to RAL 9010                                |
| Fire Behaviour | non flame propagating   |
| Classification | 33211   |

**PVC-LSF** 

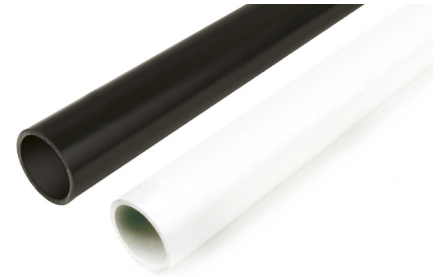


Standard: EN 61386-21



| Compression resistance | Impact resistance | Operating temperature | Bending strength | Material |
|------------------------|-------------------|-----------------------|------------------|----------|
| > 750 N                | > 2 J             | -5 to +60 °C          | Rigid            | PVC-LSF  |

| Art. no.           | Outer diameter | Inner diameter | ps  | pl   |
|--------------------|----------------|----------------|-----|------|
| 103 718 BSSH 20 WH | 20 mm          | 16,4 mm        | 3 m | 90 m |
| 103 719 BSSH 25 WH | 25 mm          | 21,4 mm        | 3 m | 90 m |
| 105 790 BSSH 20 BK | 20 mm          | 16,4 mm        | 3 m | 90 m |
| 105 791 BSSH 25 BK | 25 mm          | 21,4 mm        | 3 m | 90 m |

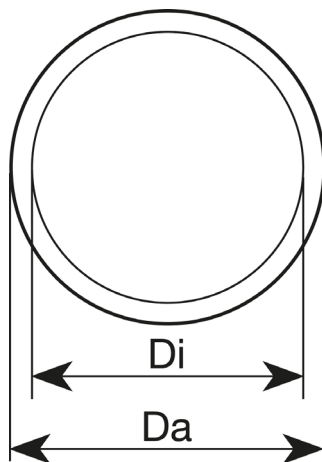

For sale in the UK market only.