


Data sheet

Part No.	FXKVR BK
Description	double-walled ducting with draw-wire, halogen-free, low smoke, LS0H
Properties	corrugated exterior, smooth interior, including one coupler medium resistance against compression, normal impact resistance
Colour	black, similar to RAL 9005
Fire Behaviour	flame propagating
Classification	N 450
Compression resistance	> 450 N



Standard: EN 61386-1, EN 61386-24, EN 50626-1, EN 50626-2, OVE E 8635 (ÖNORM E 6517)

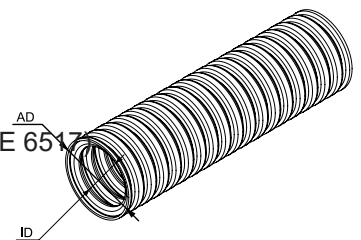

Working temperature
-30 to +70 °C

Art. No.	ED	ID	Bending radius	PU	PU
110265	40 mm	31 mm	350 mm	50 m	1400 m
110266	50 mm	40 mm	350 mm	50 m	1000 m
110267	63 mm	50 mm	350 mm	50 m	2250 m
110268	75 mm	61 mm	375 mm	50 m	1200 m
041343	90 mm	74 mm	420 mm	50 m	-
041344	110 mm	92 mm	540 mm	50 m	-
041990	125 mm	105 mm	600 mm	50 m	-
042514	160 mm	136 mm	650 mm	25 m	-
099585	200 mm	176 mm	1000 mm	25 m	-

Areas of Recommended Application

Area	
Flush mounted (plaster)	false
Surface mounted	false
Suitable for installation on wood	false
Hollow wall	false
Suitable for concrete installation	true
Machine and systems installation	false
Suitable for subsurface installation (screed)	true
Outdoor installation	false
Underground installation	true

Further technical details

Details	
Model	Pliable
Shape	Outer side ribbed, inner side plain
Surface protection	Untreated
Material	PE-HD

Cardboard packaging used is made from 100% waste paper and is fully recyclable,
plastic packaging is fully recyclable.

All figures refer to standardised test samples and are given to our best knowledge but without further commitment. It is Univolt's belief that information set forth in this Data Sheet is accurate, Univolt, Dietzel GmbH, 1110 Wien, 1. Haidequerstraße 3-5, www.dietzel-univolt.com, office@dietzel-univolt.com, makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice.